


## PrimaColor-Select

QUICK COLOR CHANGE




- Ultra Quick Color Change
- Simple and Fast Recipe Control
- Dynamic Remote Settings

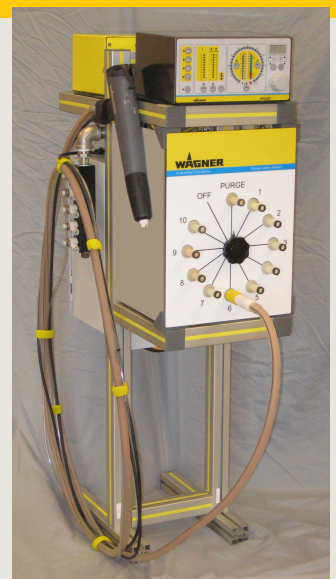

# Powder Color Changes in Less than 60 Seconds!



Ergonomic, lightweight and perfectly balanced HiCoat C4 manual gun

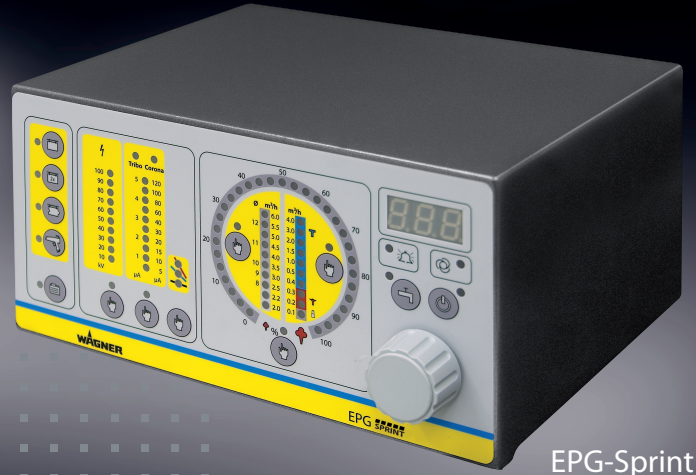

EPG-Sprint

## PrimaColor-Select

The new WAGNER PrimaColor-Select is designed for the quickest powder color change while providing the least potential for cross-contamination and powder loss.

WAGNER PrimaColor-Select incorporates simple, robust pneumatic control system of up to 10 powder feed systems. Including hopper fluidizing air and powder injector feed air and dosage air. The operator control panel includes the WAGNER PrimaColor-Select dial and quick connect ports for 10 colors. A WAGNER PrimaSprint manual system may also be integrated with the PrimaColor-Select unit.

## HiCoat C4 Manual Spray Gun

The PrimaColor-Select may be equipped with a WAGNER PEM-C4 HiCoat manual gun and EPG-Sprint control unit providing highest first-pass transfer efficiency, optimum film build uniformity and powder utilization resulting in a perfect finish. The gun is designed to be very light for fatigue-free operation. HiCoat manual guns can be fitted with various nozzles for any application.

## EPG-Sprint Control Unit

The WAGNER EPG-Sprint manual control unit combines attractive design and superior functionality. Easy handling and exceptional coating results are achieved by the electronic controller EPG-Sprint. Its central dynamic control dial combines operation of all parameters, which are divided into four functional groups. Unique cascade characteristic curve settings, Corona and Tribo compatibility along with 50 storable coating programs offer the greatest flexibility for all types of powder. Intuitive handling paired with AFC-technology provides perfect gun control. The EPG-Sprint control unit is FM certified.

## 5 Simple Steps to Operate

1. Remove the quick-connect powder hose from the last color used.
2. Connect the powder hose to the purge port, rotate dial to Purge.
3. Automatic purge cycle of powder pathway including gun and powder hose. Operator blows-off gun exterior.
4. Remove the quick-connect powder hose from the purge port and connect to the next color.
5. Rotate dial to the next color and begin coating!

## PrimaColor-Select

- Color Changes in less than a Minute!
- Easy to Operate and Maintain
- EPG-Sprint Recipe Control
- Lowest Cost of Ownership

### Dimensions:

Width	13"
Height	47.5"
Depth	26"
Weight	approx. 75 lbs

### Electrical:

Voltage	100-240 VAC
Input power	100 W
Protection class	IP 64
Ex-zone	Ex II 3D T85° C

### Pneumatic:

Supply air pressure	0.6-0.8 MPa; 6-8 bar; 97-116 psi
Air consumption	1-2 m <sup>3</sup> /h <sup>3</sup> ; 35-70 cf
Required compressed air quality	acc. to ISO 8573-1 Class 2 Quality class 5 2 3 3

Wagner Systems, Inc.  
Industrial Solutions  
300 Airport Road, Unit 1  
Elgin, IL 60123  
Tel. 630-503-2400  
Fax 630-503-2377



[www.wagnersystemsinc.com](http://www.wagnersystemsinc.com)